


# HI-TAK® StructureSeal® Non-Conductive Rolled Gaskets

This product is a pre-cured polyurethane sealant tape with a crush-resistant carrier providing either two-sided or single-sided sealing. It is designed for sealing and moisture-proofing between irregular surfaces. This product works best when applied under compression between two surfaces. The single-sided version with a PTFE backing is specifically designed for moisture-proof irregular surfaces where abrasion resistance is required. The system demonstrates excellent cohesion and allows for easy removal when necessary. These products are also available die cut in gasket form. Common use is under floor boards, under lavs and galleys, under door sills and on stringers. This product is also available in flame retardant (FR).

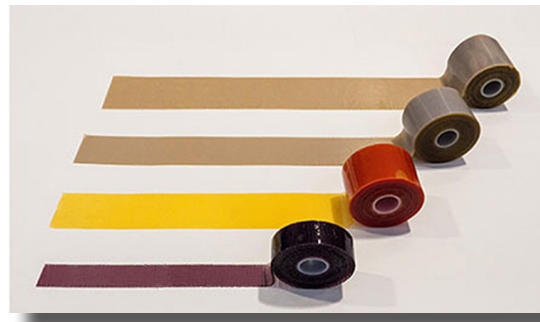

## TYPICAL PHYSICAL PROPERTIES

Part Number Series	HT4935	HT4000	HT6935	HT6000
Color	Plum	Gray w/PTFE	Plum	Gray w/PTFE
Frame (Mesh)	Polypropylene (0.030in thick)	Polypropylene (0.030in thick)	Nylon (0.015 in thick)	Nylon (0.015 in thick)
Thickness	0.045 in (1.14 mm)	0.045 in (1.14 mm)	0.045 in (1.14 mm)	0.045 in (1.14 mm)
Weight/Area	0.026 oz/in <sup>2</sup> (0.116 g/cm <sup>2</sup> )	0.032 oz/in <sup>2</sup> (0.139 g/cm <sup>2</sup> )	0.025 oz/in <sup>2</sup> (0.110 g/cm <sup>2</sup> )	0.027 oz/in <sup>2</sup> (0.119 g/cm <sup>2</sup> )
Shelf Life	Indefinite (in original packaging and protected from UV exposure)			
Service Temperature Guide (RTCA DO-160G, Sec. 5)	-65°C to 135°C (-85°F to 275°F)			
Corrosion Prevention - Salt Fog 3000hrs (ASTM B117)	No Corrosion Present			
Pressure Retention (14 CFR part 25 § 25.1438(a))	Pass, maintained a pressure of 2 atm (29.4 PSI) for 4 days			
SDS	SDS information can be requested at <a href="mailto:info@avdec.com">info@avdec.com</a>			

Aviation Devices & Electronic Components L.L.C. (Av-DEC) believes that the information contained herein is accurate as of the date of issue. NO WARRANTY EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, FOR FITNESS FOR ANY PURPOSE, MERCHANTABILITY OR ANY OTHER WARRANTY, IS MADE CONCERNING THE PRODUCT AND INFORMATION PROVIDED HEREIN. NO ONE ACTING FOR OR ON BEHALF OF AV-DEC IS AUTHORIZED TO MAKE ANY EXPRESSED OR IMPLIED WARRANTY REGARDING THE PRODUCT AND INFORMATION PROVIDED HEREIN. In no event shall Av-DEC's liability for any breach of warranty exceed the purchase price of the material as to which a claim is made. Further, since the conditions and methods of use are beyond the control of Av-DEC, Av-DEC expressly disclaims any and all liability as to any results obtained or arising from any use of this product or reliance on such information provided herein. Rather, buyers and users of the product and information provided herein are responsible for all loss or damage from use or handling of this product and information provided herein, including, but not limited to, incompatibility with other products, weather conditions, environmental conditions, and those conditions which are outside the ranges of appropriate industrial practice. The information provided herein, and the product, are furnished on the condition that the persons receiving them shall make their own determination as to the suitability of the product for their particular purpose and on the condition that they assume the entire risk of their use. In addition, no authorization is given nor implied to practice any patented invention without a license.

—Av-DEC PROPRIETARY—

*NOTICE – This report and any attachments thereto contains Proprietary Information of Aviation Devices and Electronic Components LLC (Av-DEC). This report is the property of Av-DEC, and any disclosure of its contents to others is given in confidence. This information must not be disclosed, reproduced or copied, in whole or in part, or used in any way without the specific written approval and permission of Av-DEC.*