


HI-TAK TAPE® TufSeal® HT3000


Pre-cured polyurethane tape sealant with fiberglass carrier and PTFE backing for one sided sealing. Designed for repeated use to seal and moisture-proof irregular surfaces where abrasion resistance is required. The system demonstrates excellent adhesion to itself (cohesion) and allows for easy removal when necessary. Also available die cut in gasket form. Common use is under floor boards, under lavs and galleys, under door sills and on stringers. Also available in flame retardant (FR).



Floor Board Installation

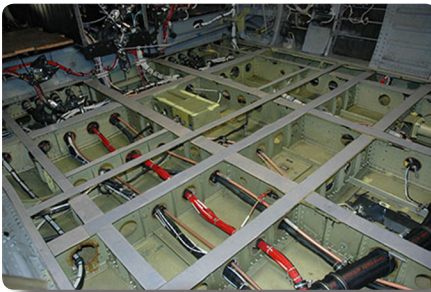

TufSeal™ HT3000 on access panel

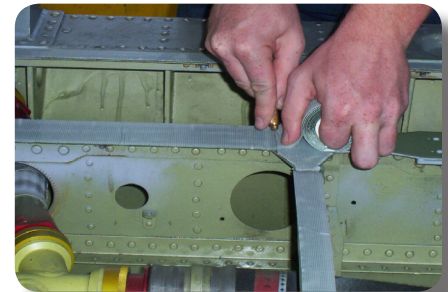

Easy application

Feature	Benefit
Ease of installation and removal	Reduction in: return-to-service time, troubleshooting time, labor cost, hanger time
Leaves no residue when removed	No solvents required, no scraping required, no paint adhesion issues
Consistent, easy installation	In roll form or die cut for a specific application, HI-TAK Tape® assures proper sealing with 100% surface contact
Polyurethane material	Non-hazardous, no silicone oil residue before, during, or after installation or removal
Replaces moisture-retaining products under floorboards	Positive moisture barrier, easy floorboard removal, provides noise and vibration dampening