


TufStuff™

Av-DEC's two-component polyurethane material is designed for use as a weather-tight, self-leveling, rigid sealant. The rigid nature of this system provides potential abrasion resistance where minor traffic is expected (i.e., cargo bay tie down areas). The system demonstrates excellent cohesion after installation or repair and provides a high degree of environmental protection with maximum sealing. The common uses are in the cargo bay tie down areas and behind chemical toilet areas to cover Self-Leveling Green®.

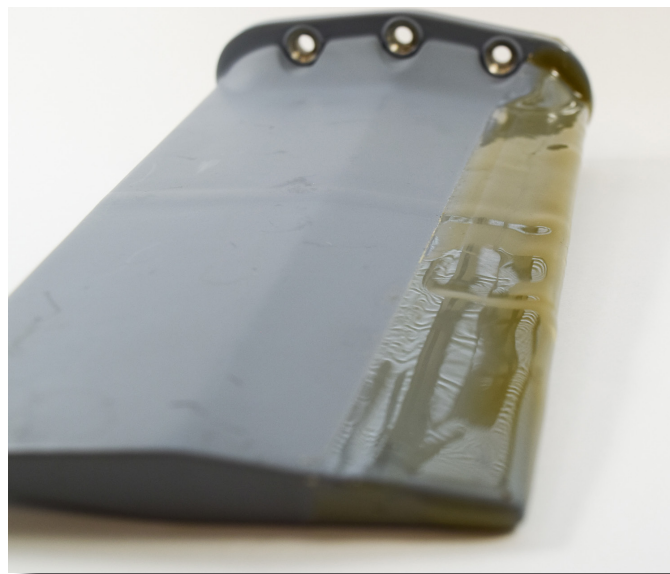

TufStuff™ installed on leading edge of antenna.

FEATURES	BENEFITS
Provides a high level of tack to most substrates	Moisture barrier, corrosion protection, improved reliability, repair/scrap
Ease of installation	Low viscosity and cohesive properties assure proper sealing with 100% surface contact
Ease of removal	Reduction in: return-to-service time, troubleshooting time, labor cost, hanger time
Leaves no residue when removed	No solvents required, no scraping required, no paint adhesion issues
Replaces moisture-retaining products around connectors	Non-hazardous, no residue before, during, or after installation or removal



TufStuff™ applied to Cargo Fitting.

TYPICAL PHYSICAL PROPERTIES

Part Number Series	TS1228
Color, properly mixed	Clear
Reaction ratio - by volume	100 : 200
Specific Gravity, mixed, at 77°F / 25°C (Calculated)	1.05 to 1.07
Viscosity, resin, Cps. at 77°F / 25°C (ASTM D2556)	75 to 250
Viscosity, hardener, Cps. at 77°F / 25°C (ASTM D2556)	700 to 1200
Working Life at 77°F / 25°C	< 8 minutes
Gel time, 10 g Mass at 77°F / 25°C (ASTM D7997)	< 12 minutes
Shelf life - in original packaging and stored above 55°F / 13°C	9 months
Storage temperature	> 55.4°F / 13°C
Service temperature guide (Per RTCA DO-160G Section 5, 2 cycles)	-85°F to 275°F / -65°C to 135°C
Application temperature	> 55°F / 13°C
Hardness, Shore "A" at 77°F / 25°C at 24 hrs (ASTM D2240)	> 50
Dielectric Strength (ASTM D149 Method A)	> 400 V/mil
Tensile Strength (ASTM D412)	> 350 PSI
Elongation (ASTM D412)	> 60%
Fire Retardant per 14 CFR, PART 25-Subpart D, § 25.853 Compartment interiors & § 25.855 Cargo or baggage compartments Appendix F, Part I, (a)(1)(ii) (12 sec vertical test)	Passed
SDS	SDS information can be requested at info@avdec.com

Aviation Devices & Electronic Components L.L.C. (Av-DEC) believes that the information contained herein is accurate as of the date of issue. NO WARRANTY EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, FOR FITNESS FOR ANY PURPOSE, MERCHANTABILITY OR ANY OTHER WARRANTY, IS MADE CONCERNING THE PRODUCT AND INFORMATION PROVIDED HEREIN. NO ONE ACTING FOR OR ON BEHALF OF AV-DEC IS AUTHORIZED TO MAKE ANY EXPRESSED OR IMPLIED WARRANTY REGARDING THE PRODUCT AND INFORMATION PROVIDED HEREIN. In no event shall Av-DEC's liability for any breach of warranty exceed the purchase price of the material as to which a claim is made. Further, since the conditions and methods of use are beyond the control of Av-DEC, Av-DEC expressly disclaims any and all liability as to any results obtained or arising from any use of this product or reliance on such information provided herein. Rather, buyers and users of the product and information provided herein are responsible for all loss or damage from use or handling of this product and information provided herein, including, but not limited to, incompatibility with other products, weather conditions, environmental conditions, and those conditions which are outside the ranges of appropriate industrial practice. The information provided herein, and the product, are furnished on the condition that the persons receiving them shall make their own determination as to the suitability of the product for their particular purpose and on the condition that they assume the entire risk of their use. In addition, no authorization is given nor implied to practice any patented invention without a license.

—Av-DEC PROPRIETARY—

NOTICE - This report and any attachments thereto contains Proprietary Information of Aviation Devices and Electronic Components LLC (Av-DEC). This report is the property of Av-DEC, and any disclosure of its contents to others is given in confidence. This information must not be disclosed, reproduced or copied, in whole or in part, or used in any way without the specific written approval and permission of Av-DEC.